


## Surface

**Q.** How many tiles do I need?

**A.** Divide your surface by the surface of one tile: 0.2025 m




### Laying and Filling




To cover a surface use uncut tiles centered on the surface; fill remaining spaces with timber frame, metal trim, pebbles or another suitable material. Install tiles touching each other or keep a small gap between each tile.

## Installation


### Fasteners on Top Slats

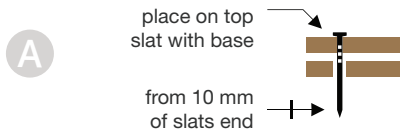

### Fasteners Inside Gaps

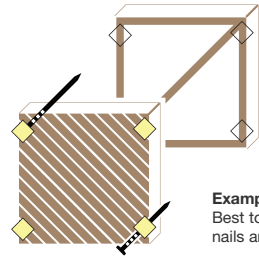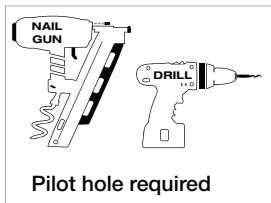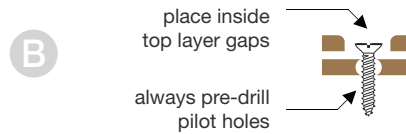

Example : Best top slats for nails and screws

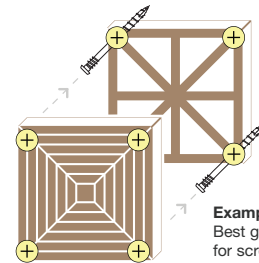


Example : Best gaps for screws

### Acclimate Tiles

- 1 Open boxes and leave on-site covered.
- 2 Allow air to circulate through the tiles.
- 3 Let tiles acclimate for about 2 weeks.

### Fasteners Size Guide

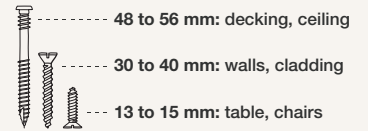

### Instructions:

Select the installation option according to gaps between slats which are about 4 to 8mm. Gaps position also varies with various tile models.


### Step-by-Step Tiles on Joists

- 1 Select the correct tile base type.
- 2 Reinforce all bases after modifications.
- 3 Minimum 3 joists 202.5 mm spacing.
- 4 45 mm standard joist thickness.
- 5 Joists measured centre-to-centre.
- 6 Support tiles centre, corners, edges.
- 7 Test strength and stability before use.

## Type


### Type of Tile Base

#### STANDARD





Walls - furniture

#### REINFORCED




Walking - decking

### Tiles Over Joists

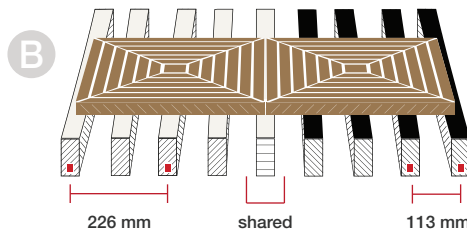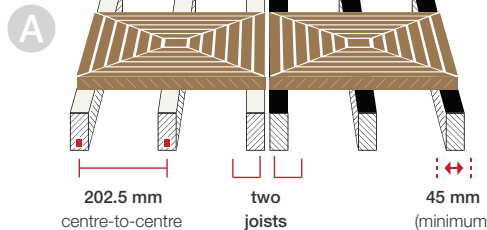

### Showing a Reinforced Base on Joists

1. All base slats supported.
2. Centre must be supported.

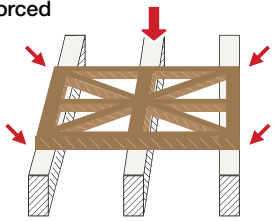

## Environment


### Natural Wood to Gray

If left natural, untreated out in the elements and in favorable conditions teakwood will weather and gray.

### Using Paint or a Finish

Naturally oily hardwoods such as teakwood may require an aluminum wood primer prior to painting.

### Paint Application

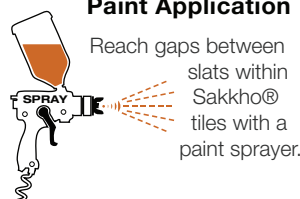

### SAKKHO® DISCLAIMER AND RECOMMENDATIONS

1. The S.I.T.E. Check is a guide only as other options for temporary or permanent installation are possible.
2. Sakkho® does not offer installation or advice for particular projects - contact an accredited installer.
3. Give a copy of the S.I.T.E. Check to your installer.
4. Inherent irregularities in the wood grain and tint or minor asymmetries resulting from hand assembly are possible.
5. Modifications should be made by qualified professionals and modified tiles should always be reinforced.
6. When used as decking or flooring, ideally install tiles during a season with an average humidity level as the timber will better acclimatise to seasonal changes.
7. For safe decking, flooring or seating usages, the centre, all corners and all side edges of all tiles, as well as all slats of the tile base must always be fully supported.
8. Never use a faulty tile subject to our return policy.
9. Merchantability of tiles is limited when using thin high-heeled footwear or thin-legged chairs due to gaps.
10. Sakkho® rejects all responsibility related to the choice of tile or base type
11. Model specifications may vary without prior notice.
12. Errors or omissions are unintentional.
13. For most actual content and updated versions and complete or current Terms, Warranty and Disclaimers visit [www.sakkho.com](http://www.sakkho.com)

Copyright© sakkho



need more info?

[sakkho.com](http://sakkho.com)



Sakkho  
P.O.Box 454,  
Bentleigh East,  
VIC 3165, Australia  
[www.sakkho.com](http://www.sakkho.com)